



萬向接頭

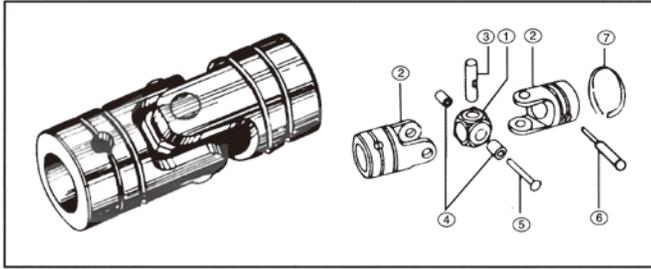


規格 編號	名稱	材質	數量
(1)	連接方塊	SCM-21	1
(2)	主體	SCM-21	2
(3)	直綫梢	SCM-21	1
(4)	半綫梢	SCM-21	2
(5)	鉚接梢	SV34	1
(6)	強力梢	SCM-21	2
(7)	固定環	SWP	1

JCH-**-00A


type- ϕd -code

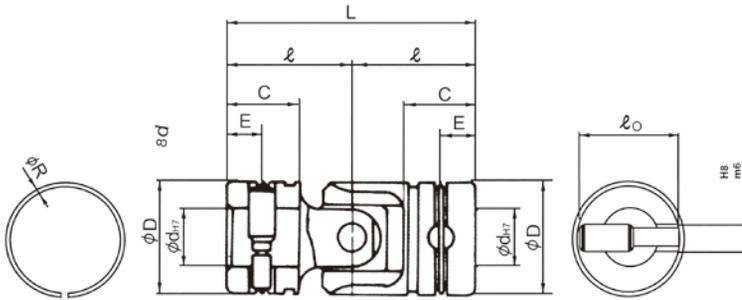

JCH-**-01A

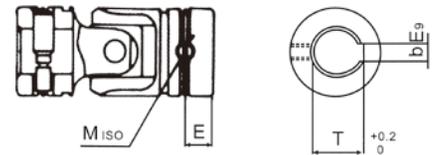

JCH-**-02A

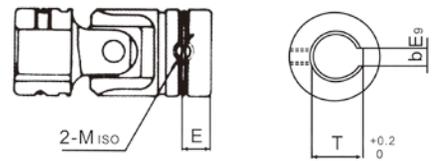


單位 / Unit:mm

型號	尺寸	d	D	C	E	l	L	P	l ₀	R	G	容許扭力(kgf-m)		靜的破壞 扭力(kgf-m)	靜的引張 破壞荷重(kgf)	重量 (g)
												強力梢	固定梢			
JCH-03-0 0 A		3	6	9	2.5	13	26	1	5	0.3	-	-	-	0.04	70	5
JCH-04-0 0 A		4	8	7	4	12	24	1.5	6.8	0.3	-	-	0.30	0.3	130	8
JCH-05-0 0 A		5	10	9	5	15	30	2	8.7	0.4	-	-	0.55	1.0	210	12
JCH-06-***		6	12	9	4.5	15.5	31	3	10	0.6	-	0.95	0.64	1.7	550	15
JCH-08-***		8	15	10	5	18	36	3.5	12.5	0.8	25	1.73	1.16	3.6	800	30
JCH-10-***		10	19	12	6	21	42	4.5	16.5	1	32	3.58	2.40	8.5	1420	55
JCH-12-***		12	23	15	7.5	26	52	5	20.5	1	35	5.30	3.55	15	2440	110
JCH-14-***		14	26	17	8.5	29.5	59	5.8	23	1.2	40	8.32	5.57	21	2700	155
JCH-16-***		16	30	22	11	37	74	6.5	26.5	1.4	46	11.95	8.00	32	3980	260
JCH-18-***		18	33	23.5	11.75	40.5	81	7	28.5	1.8	52	15.58	10.44	41	4520	345
JCH-20-***		20	36	25	12.5	43.5	87	8	31.5	1.8	58	22.62	15.15	54	5330	465
JCH-22-***		22	40	27	13.5	47	94	9	34.5	2	62	31.50	21.10	78	6960	630
JCH-25-***		25	44	30	15	52.5	105	10	38.5	2	68	44.18	29.60	103	8310	790
JCH-30-***		30	51	35	17.5	61	122	11.5	44	2.5	82	70.10	46.96	156	10580	1160
JCH-35-***		35	59	40	20	70	140	13	52	2.5	90	104.52	70.03	248	14670	2255
JCH-40-***		40	67	45	22.5	78.5	157	14.5	60	2.5	100	148.62	99.58	375	19320	2730
JCH-45-***		45	75	50	25	88	176	16	68	2.5	110	203.58	136.40	490	23210	4350
JCH-50-***		50	83	55	27.5	95.7	191.5	17.5	76	2.5	120	270.60	181.30	598	29080	5200
JCH-60-8 8 A		60	98	70	-	118	236	-	-	-	140	-	-	1162	43490	6538


注: 無尺寸表示同於JCH-**-00A.

*表中容許扭力數值為梢片破斷強度^{1/3}(靜負荷 0°時)


JCH-***-04A

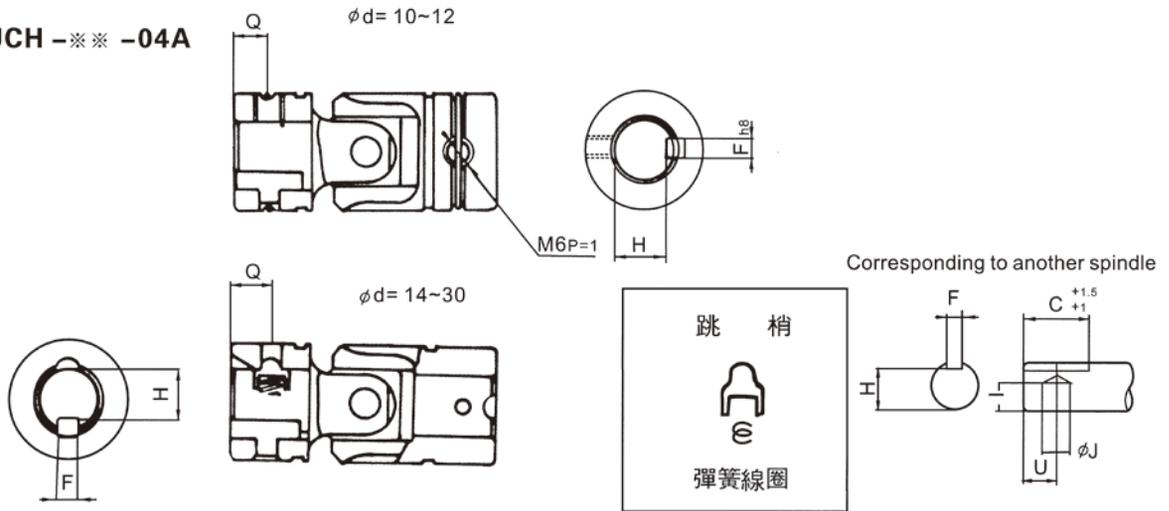


JCH-***-06A

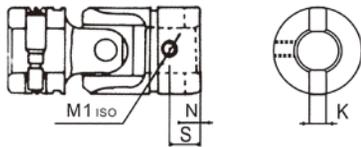

JCH-***-08A



JCH-***-88A

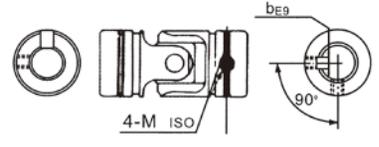


單位 / Unit:mm

型號 \ 尺寸	b	T	M	Q	F	H	I	J	U	K	N	S	M1
JCH-06-***	-	-	3	-	-	-	-	-	-	3	3.5	4.5	3
JCH-08-***	3	9.5	3	-	-	-	-	-	-	3	3.5	5	4
JCH-10-***	4	11.5	5	5.5	4	7.5	-	-	-	4	4.5	5	5
JCH-12-***	4	13.5	5	6.5	4	9.5	-	-	-	4	4.5	6	6
JCH-14-***	5	16	6	10	5	11.5	10	6	6	5	5.5	8.5	6
JCH-16-***	5	18	6	12	5	13.5	12	6	6	5	5.5	9	6
JCH-18-***	5	20	6	12	5	15.5	13	8	8	5	5.5	10	8
JCH-20-***	5	22	6	15	5	17	15	8	8	6	6.5	12	8
JCH-22-***	7	25	6	15	6	19	16	8	8	-	-	-	-
JCH-25-***	7	28	8	21	7	21	18	8	8	-	-	-	-
JCH-30-***	7	33	8	25	7	26	21	10	9	-	-	-	-
JCH-35-***	10	38.5	10	-	-	-	-	-	-	-	-	-	-
JCH-40-***	10	43.5	10	-	-	-	-	-	-	-	-	-	-
JCH-45-***	12	48.5	10	-	-	-	-	-	-	-	-	-	-
JCH-50-***	12	53.5	10	-	-	-	-	-	-	-	-	-	-
JCH-60-8 8 A	15	65	12	-	-	-	-	-	-	-	-	-	-

JCH-***-***C

附橡膠護套



充填潤滑油脂

φ35以上尺寸需另制護套事先指示

Filled with grease
Over φ35 in size, bellows to order
Instruct us in advanc.

(注) 無表示尺寸同於 JCH-**-00A. No indicating dimension is same as JCH-**-00A